

ANALOG PRODUCTS

MC33886 FACT SHEET



APPLICATIONS

- Automotive Systems
- DC-Motor Control in Industrial and Robotic Systems
- DC-Motor and Actuator Control in Boats, RVs, and Marine Systems
- Appliance and White Goods Electrical Actuators
- Powered Machine and Hand Tools
- Antenna Rotors and Dish Positioning Systems


33886 5.2 AMP H-BRIDGE

The 33886 is a monolithic H-Bridge that is ideal in applications to control fractional horsepower DC-motors or bi-directional thrust solenoids. The IC incorporates internal control logic, charge pump, gate drive, and low $R_{DS(ON)}$ MOSFET output circuitry. The 33886 is able to control continuous inductive DC load currents to 5.2 A. Output loads can be Pulse Width Modulation (PWM) controlled at frequencies to 10 kHz.

A Fault Status output reports under voltage, over current, and over temperature conditions. Two independent inputs control the two half-bridge totem-pole outputs making possible forward, reverse, freewheeling low, and freewheeling high active output states. Two complementary disable inputs are provided, the either of which can place the outputs in a high impedance "OFF" state.

The 33886 is operational over a wide range of conditions and is available in an economical surface mount package.

Simplified Application Diagram

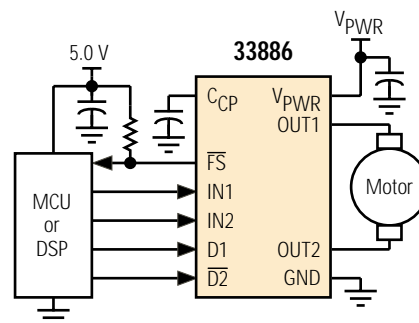

CUSTOMER BENEFITS


- Easiest way to interface a microcontroller to a DC-motor
- Simplified system design
- Built-in current limiting
- Built-in thermal shutdown
- Versatile output control (each Totem-Pole output is independently controlled)
- Reduced board space
- Enhanced reliability

Performance	Typical Values
Outputs	2
RMS Current	5.2 A
$R_{DS(ON)}$ @ 25°C	120 mΩ
Operating Voltage	5.0 – 30 V
Peak Current	8.0 A each output
Switching Time	5.0 μs
ESD	± 2000 V
Operating Temp	-40°C ≤ T _A ≤ 125°C
Junction Operating Temp	-40°C ≤ T _J ≤ 150°C

FEATURES

- Operating supply voltage 5.0 V to 30 V
- Withstands 40 V V_{PWR} transients
- 120 m Ω $R_{DS(ON)}$
- Continuous DC-load current up to 5.2 A
- Logic inputs TTL/CMOS compatible
- 10 kHz typical PWM frequency
- Power-saving sleep mode
- Diagnostic status flag output
- Additional devices available for comparison in Analog Selector Guide SG1002/D

Protection	Detect	Limiting	Shut Down	Auto Retry	Status Reporting
Under Voltage	•	•		•	
Over Current/SC	•	•		•	•
Over Temperature	•	•	•	•	•
Open Load	•	•		•	•
Short to GND	•	•		•	•
Short to V_{PWR}	•	•		•	•

Ordering Information	Package	Ship Method	Motorola Part Number
	20 HSOP	Rail T/R	**33886DH **33886DHR2
Data Sheet Order Number			MC33886/D
Contact Sales for Evaluation Kit Availability			
**Prefix Index: PC = Eng Samples; XC = In Qual; MC = Production			

QUESTIONS

- Do you need to control a DC-motor via microprocessor?
- Are you designing a DC-motor controller for motors up to 5.2 A and up to 30 V DC?
- Do you need to drive a motor in both forward and reverse or a solenoid in both push and pull?
- Do you need to incorporate PWM speed and torque control?
- Do you need to provide active braking and freewheeling?

How to reach us:




USA/EUROPE/Locations Not Listed: Motorola Literature Distribution;
P.O. Box 5405, Denver, Colorado 80217
1-303-675-2140 or 1-800-441-2447

JAPAN: Motorola Japan Ltd.; SPS, Technical Information Center,
3-20-1, Minami-Azabu, Minato-ku, Tokyo 106-8573 Japan
81-3-3440-3569

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; Silicon Harbour Centre,
2 Dai King Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong
852-26668334

Technical Information Center: 1-800-521-6274

HOME PAGE: <http://www.motorola.com/semiconductors>



MOTOROLA and the Stylized M Logo are registered in the U.S. Patent & Trademark Office. All other product or service names are the property of their respective owners.
© Motorola, Inc. 2002

MC33886FS/D
Rev. 1