

ANALOG PRODUCTS

MC33793 FACT SHEET



33793 DISTRIBUTED SYSTEM INTERFACE (DSI) TRANSCEIVER AND RECEIVER

The 33793 is designed to be used with a sensor or actuator at a location that is remote from a centralized MCU. This device provides power, measurement, local logic I/O, and communications between the remote sensor and the centralized MCU over a DSI bus.

Sensors such as accelerometers can be powered from the regulated output of the device and the resulting analog value from the sensor can be converted by the 33793 from an analog level to a digital value for transmission over the DSI bus in response to a query from the MCU.


Four I/O lines can be configured by the central MCU over the DSI bus as analog inputs, digital inputs, or digital outputs. This allows more than one sensor to be remotely controlled and measured by a single 33793. Additionally, a high-drive logic output is provided that can be used to power other low-power sensors or indicators.

The 33793 can replace an MCU and its supporting hardware in remote measurement and control applications, resulting in a significant cost reduction.

APPLICATIONS

- Simple Bus-Controlled Part for Remote Control and Sensing
- Automotive, Aircraft, Marine and Industrial Control and Safety Systems
- Heating and Air-Conditioning

Simplified Application Diagram

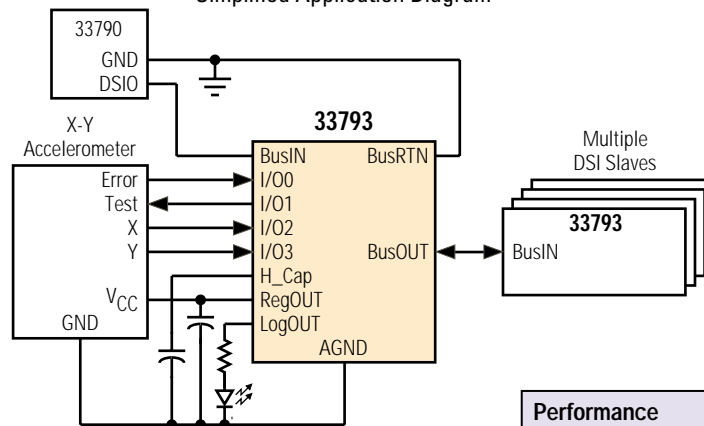

CUSTOMER BENEFITS

- Reduces cost of remote control and measurements
- Eliminates the need for a separate remote power source and wires


Performance	Typical Values
Operating Voltage	7.0 – 30 V
Data Rate	5 k – 150 kB/s
Reg. Outputs	6.0 mA @ 5.0 V
Regulation	± 5.0 %
ESD	± 2000 V
Operating Temp	-40°C ≤ T _A ≤ 125°C

SAFETY/SECURITY
DISTRIBUTED SYSTEM

FEATURES



- Four-channel 8 bit A/D converter
- Four pins configurable as analog or logic inputs or as logic outputs
- Provides regulated + 5.0 V output for sensor power from bus
- Additional high-drive logic output
- On-board clock (no external elements required)
- Field-programmable address
- Default and field programmable as a DSI daisy chain device
- Recognizes reverse initialization for open bus fault tolerance
- Additional devices available for comparison in Analog Selector Guide SG1002/D

Protection	Limiting	Shut Down	Active Pull Up/Down
Under Voltage		•	
Over Current	LogOUT		
Open I/O Pins			•

Ordering Information	Package	Ship Method	Motorola Part Number
	16 SOICN	Rail T/R	**33793D **33793DR2
Data Sheet Order Number			MC33793/D
Contact Sales for Evaluation Kit Availability			
**Prefix Index: PC = Eng Samples; XC = In Qual; MC = Production			

QUESTIONS

- Are you working with vehicular safety systems?
- Do you need an inexpensive way to remotely power, measure, and control things?
- Are you currently using an MCU at remote locations to provide communications, control, and measurement? The DSI bus family of parts can do this with a single low-cost part and eliminate power supplies, software, and many support components at the remote location.



How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution;
P.O. Box 5405, Denver, Colorado 80217
1-303-675-2140 or 1-800-441-2447

JAPAN: Motorola Japan Ltd.; SPS, Technical Information Center,
3-20-1, Minami-Azabu, Minato-ku, Tokyo 106-8573 Japan
81-3-3440-3569

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; Silicon Harbour Centre,
2 Dai King Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong
852-26668334

Technical Information Center: 1-800-521-6274

HOME PAGE: <http://www.motorola.com/semiconductors>



MOTOROLA and the Stylized M Logo are registered in the U.S. Patent & Trademark Office. All other product or service names are the property of their respective owners.
© Motorola, Inc. 2002

MC33793FS/D
Rev. 1