

ANALOG PRODUCTS

MC33385 FACT SHEET



33385 QUAD LOW-SIDE SWITCH (250 mΩ R_{DS(on)})


The 33385 is a fully protected quad low-side switch. It interfaces directly with a microcontroller for parallel control of independent output loads. Independent output diagnostics are via SPI. The diagnostic logic reports output over current, output short-to-GND, output open load, and over temperature conditions.

The 33385 outputs are current limited and internally clamped to control incandescent and inductive loads.

APPLICATIONS

- Aircraft Systems
- Automotive Systems
- Robotic Systems
- Farm Equipment
- Industrial Actuator Controls
- Fractional Horsepower DC-Motor Controls
- Marine Applications
- Applications where Low-Side Switch Control with Diagnostics is Necessary

Simplified Application Diagram

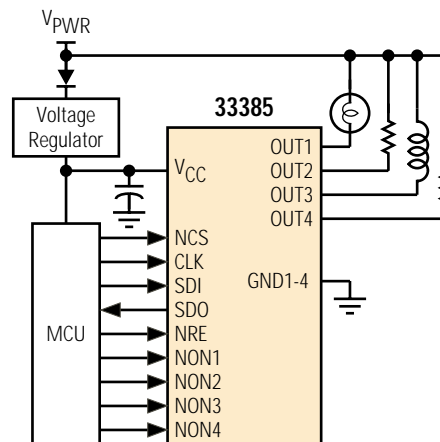

CUSTOMER BENEFITS


- Simple solution for operating low-side power FETs at voltage up to 45 V
- Simple low-side switching of output inductive loads due to internally clamped outputs
- Simple system design with direct interfacing to a microprocessor
- Reduced PC board space resulting in enhanced application reliability and lower costs
- Increased efficiency when paralleling outputs

Performance	Typical Values
Outputs	4
R _{DS(on)} @ 25°C	0.250 Ω
Operating Voltage	9.0 – 45 V
Peak Current	3.0 A each output
Control	Parallel
Operating Temp	-40°C ≤ T _A ≤ 125°C
Junction Operating Temp	-40°C ≤ T _J ≤ 150°C

FEATURES

- Four low-side with independent CMOS inputs
- 5.0 V V_{CC}
- SPI Diagnostic Reporting
- 2.5 A per output (steady state)
- 3.0 A current limit with automatic retry
- 50 V internally clamped outputs for inductive load switching
- Independent output over-temperature shutdown
- Additional devices available for comparison in Analog Selector Guide SG1002/D

Protection	Detect	Limiting	Shut Down	Auto Retry	Status Reporting
Over Voltage		•			
Under Voltage	•			•	
Over Current/SC			•		•
Over Temperature			•		•
Open Load					•
Short to GND					•
Short to V_{PWR}				•	

Ordering Information	Package	Ship Method	Motorola Part Number
	20 HSOP	Rail T/R	**33385DH **33385DHR2
Data Sheet Order Number			MC33385/D
Contact Sales for Evaluation Kit Availability			
**Prefix Index: PC = Eng Samples; XC = In Qual; MC = Production			

QUESTIONS

- Do you need to reduce system costs of low-side switching four loads using a microcontroller?
- Do you have to design four high-efficiency switches to control incandescent or inductive loads (or combinations of both) over a wide temperature range?
- Are you looking for an easy-to-design low-side switch, capable of switching four different high-voltage loads (45 VDC)?
- Do you require four "smart" independent low-side switches with internal protection features as well as fault reporting via a SPI interface?

How to reach us:



USA/EUROPE/Locations Not Listed: Motorola Literature Distribution;
P.O. Box 5405, Denver, Colorado 80217
1-303-675-2140 or 1-800-441-2447

JAPAN: Motorola Japan Ltd.; SPS, Technical Information Center,
3-20-1, Minami-Azabu, Minato-ku, Tokyo 106-8573 Japan
81-3-3440-3569

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; Silicon Harbour Centre,
2 Dai King Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong
852-26668334

Technical Information Center: 1-800-521-6274

HOME PAGE: <http://www.motorola.com/semiconductors>



MOTOROLA and the Stylized M Logo are registered in the U.S. Patent & Trademark Office. All other product or service names are the property of their respective owners.
© Motorola, Inc. 2002

MC33385FS/D
Rev. 1