


☉ FOR CASTER, 4 PL. +

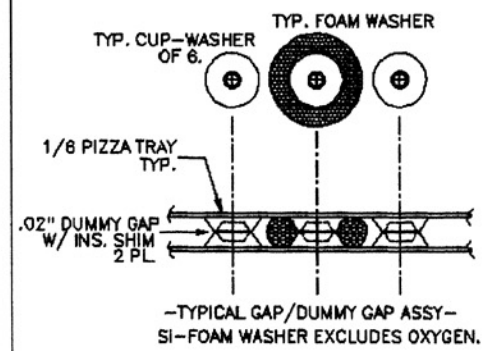

"6C": IN TWO LAYERS.
UP TO 8, EACH SECTION: CDE
940C6W4P7K, 4.7 uF 600V.
GROUPS ALTERNATE, TOP & BOTTOM.

SECONDARY & FASTENING-PLATE DIA, 12", REF.

GAP + DUMMY SPACER-GAPS

1/8, 18" DIA x 0.04" THICK PIZZA TRAY 12 PL.
TOP LIPS UP, BOTTOM LIPS DOWN.

INS. FASTENING STRIP 12 PL.

CAPACITOR LEADS TO LUGS OR BRASS EYELETS
SECURED TO TRAY WEDGES W/ INT. STAR LOCK
WASHERS.

-PROSPECTIVE 1-TURN SPARK-GAP PRIMARY-

K. C. HERRICK
kchdlh@juno.com
FILE, TSPK13A
4/30/03

CLEAT FOR SECURING SECONDARY W/
VELCRO STRAP, 4 PL.

MTG. PLATE, 24" SQ.